



**ANTI-EFFRAZIONE  
SENZA LEVA  
INTERNA**

**SERRATURE PER PORTE BASCULANTI A CILINDRO PROFILO EUROPEO INT. 70**


*LOCKS FOR OVERHEAD GARAGE DOORS WITH EUROPEAN PROFILE CYLINDER INT. 70*

*SERRURES POUR PORTES BASCULANTES, CYLINDRE PROFILE EUROPÉEN - ENTRAXE 70*


*CERRADURAS PARA PUERTAS BASCULANTES, CILINDRO DE PERFIL EUROPEO - DISTANCIA ENTRE EJES 70*



**B5A1.0811-W5A1.0821**

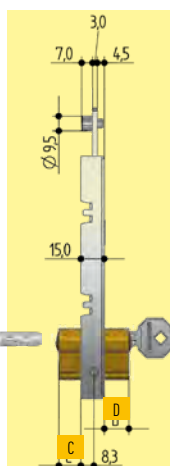

**B5A1.081B-W5A1.082B**

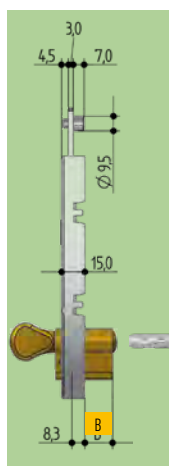

**A = 70mm**

- + Perno / foro  
Pin / hole
  - 6 bolt hole - M6
  - 8 bolt hole - M8
  - A No pin
- + Quadro maniglia / Handle hole  
Carré de poignée / Perno cuadrado
  - 7 7 x 7 mm
  - 9 9 x 9 mm

**W5A1**



codice   code   código														B mm	C mm	D mm					
1	2	3	4	5	6	7	8	9	10	11	12	13	14								
W	5	A	1	•	0	8	2	1	•	0	0	0	0	15,7	17,3	WMAS.2424	7300.2A00	40	1	10	
W	5	A	1	•	0	8	2	B	•	0	0	0	0	15,3	-	WLAS.2410	7300.2A00	40	1	1	

**B5A1**



codice   code   código														B mm	C mm	D mm					
1	2	3	4	5	6	7	8	9	10	11	12	13	14								
B	5	A	1	•	0	8	1	1	•	0	2	0	0	-	13,7	6HA0.2222	7100.1300	40	1	10	
B	5	A	1	•	0	8	1	B	•	0	0	0	0	17,3	-	6KA0.2610	7100.2400	40	1	1	



**FUNZIONE BI-STABILE (SERRATURA SENZA RIARMO AUTOMATICO)**

*RE-ARMLESS FUNCTION - FONCTION SANS RÉARMEMENT AUTOMATIQUE - FUNCIÓN SIN REARME AUTOMÁTICO*

**W5D1**



codice   code   código														B mm	C mm	D mm					
1	2	3	4	5	6	7	8	9	10	11	12	13	14								
W	5	D	1	•	0	8	2	1	•	0	0	0	0	15,7	17,3	WMAS.2424	7300.2A00	40	1	10	
W	5	D	1	•	0	8	2	B	•	0	0	0	0	15,3	-	WLAS.2410	7300.2A00	40	1	1	

**B5D1**



codice   code   código														B mm	C mm	D mm					
1	2	3	4	5	6	7	8	9	10	11	12	13	14								
B	5	D	1	•	0	8	1	1	•	0	2	0	0	-	13,7	6HA0.2222	7100.1300	40	1	10	
B	5	D	1	•	0	8	1	B	•	0	0	0	0	17,3	-	6KA0.2610	7100.2400	40	1	1	